

# Timber classrooms for cantonal school

Baden, CH



## Project details

Client	Kanton Aargau
Architecture	Blumer-Lehmann AG
Project type	Education and research, Temporary buildings
Construction type	Modular construction
Services	JC
Construction	2012
Locality	Baden
Country	Switzerland

## Modular and prefabricated construction – the flexible solution for the cantonal school's temporary classrooms

The temporary school building in Baden was intended to meet a short-term requirement for more space. The temporary structure was designed for a period of use of 5 to 8 years to provide sufficient time to plan and deliver new site solutions. The occupier imposed the same requirements as a permanent building in terms of indoor climate, structural engineering, acoustics and energy efficiency. The basic building block is a prefabricated room cell with a floor area of 31.5 m<sup>2</sup> (3.50 m -10.50 m). The room cells are connected using a demountable assembly system to ensure easy removal and re-usability of the modules.

## Specific Contact



### Migga Hug

Head of GC & TC Services |  
Architectural planning | Switzerland  
Member of the Division Management

T +41 71 388 58 23  
[migga.hug@blumer-lehmann.com](mailto:migga.hug@blumer-lehmann.com)

# Timber classrooms for cantonal school


Baden, CH



Staircase, temporary building, Baden cantonal school



View of a classroom

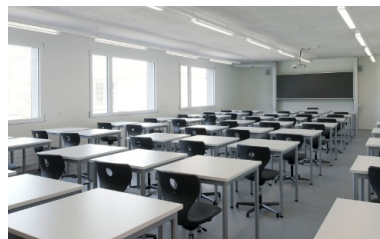

Eye-catching colour scheme in the entrance area and corridor

Standard classroom equipment and furniture