

Timber classrooms for cantonal school

Baden, CH



Timber classrooms for cantonal school

Baden, CH



Project details

Client	Kanton Aargau
Architecture	Blumer-Lehmann AG
Project type	Education and research, Temporary buildings
Construction type	Modular construction
Services	JC
Construction	2012
Locality	Baden
Country	Switzerland

Timber classrooms for cantonal school

Baden, CH



Modular and prefabricated construction – the flexible solution for the cantonal school's temporary classrooms

The temporary school building in Baden was intended to meet a short-term requirement for more space. The temporary structure was designed for a period of use of 5 to 8 years to provide sufficient time to plan and deliver new site solutions. The occupier imposed the same requirements as a permanent building in terms of indoor climate, structural engineering, acoustics and energy efficiency. The basic building block is a prefabricated room cell with a floor area of 31.5 m² (3.50 m -10.50 m). The room cells are connected using a demountable assembly system to ensure easy removal and re-usability of the modules.

Specific Contact




Migga Hug

Head of GC & TC Services | Architectural
planning | Switzerland
Member of the Division Management

T +41 71 388 58 23
migga.hug@blumer-lehmann.com

Timber classrooms for cantonal school

Baden, CH

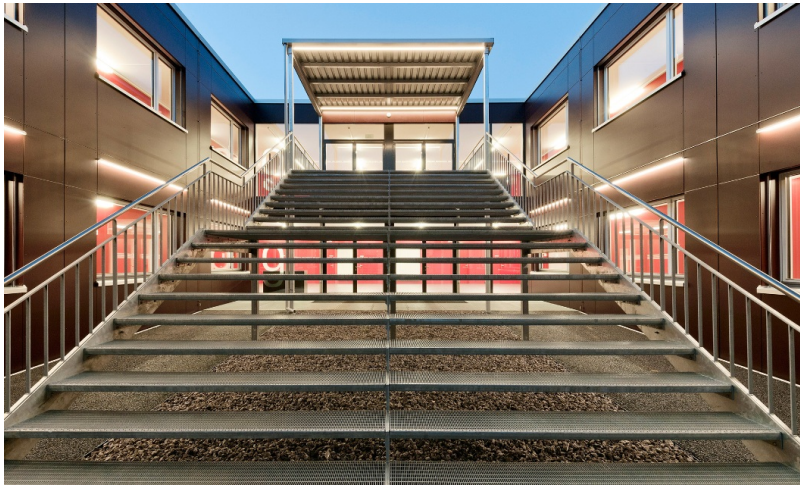

Staircase, temporary building, Baden cantonal school



View of a classroom

Timber classrooms for cantonal school

Baden, CH



Eye-catching colour scheme in the entrance area and corridor

Standard classroom equipment and furniture